

FLOOR JOINT COVERS □ Types 3F-AM & 3FAS-AM

Commercial Applications

Type 3F-AM


Use: Expansion joint covers for installation on non-completed floors.

Material: - Side-frames made of mill finish or clear-anodized aluminium alloy 60.63-T5.
 - Replaceable inserts made of UV-PVC or Santoprene TPV in black, grey or beige (other colors available upon request). PVC insert also available with anti-microbial composition upon request.


Load capacity: Pedestrian traffic. For joint widths up to 100mm assemblies are suitable for areas with slow-passing passenger cars traffic.



-> Separate compatible water- & fire-barriers available <-

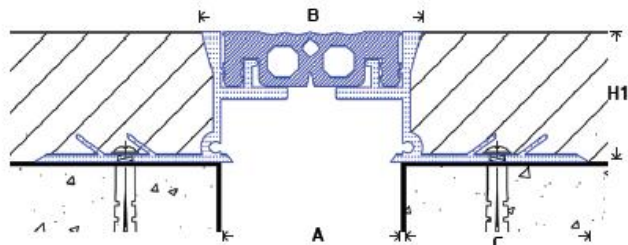

3F-AM

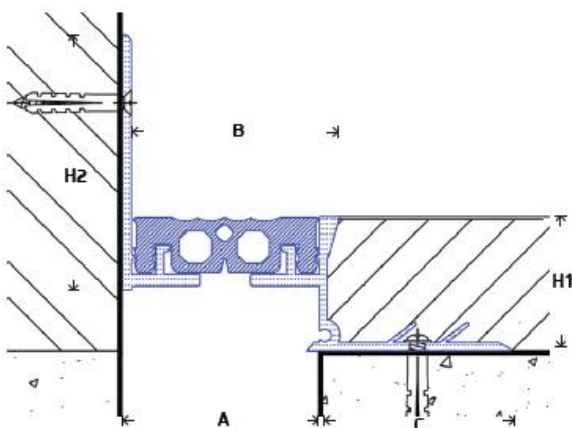

3F-AM/C

TYPE	"A"	"B"	"C"	"H1"	"H2"	Total Movement*
3F-AM 20	20	20	44	12, 17, 31	-	12
3F-AM 30	30	35	50	12, 31	-	20
3F-AM 50	50	56	50	18, 33	-	30
3F-AM 60	60	69	62	35	-	30
3F-AM 75	75	84	62	35	-	36
3F-AM 100	100	115	65	33	-	34
3F-AM 125	125	140	61	33	-	64
3F-AM 150	150	165	61	33	-	90
3F-AM/C 20	20	18	44	12, 31	40	12
3F-AM/C 30	30	28	50	12, 31	63	20
3F-AM/C 50	50	51	50	18, 33	63	30
3F-AM/C 60	60	61	62	35	68	30
3F-AM/C 75	75	76	62	35	68	36
3F-AM/C 100	100	104	65	33	83	34
3F-AM/C 125	125	129	61	33	83	64
3F-AM/C 150	150	157	61	33	83	90

Dimensions in mm

* Movements do not take into consideration PVC or Santoprene elongation at break (ISO R527)

FOR MATCHING WALL & CEILING EXPANSION JOINT COVERS PLEASE SEE PAGE 42